

# Index

- A-scan, 220–22
  - in medical diagnostic applications, 220, 222
  - in nondestructive testing, 222
- Abbreviated subscripts, 542–46
- Acoustic attenuation, 9
- Acoustic beam profile, 514–15
- Acoustic convolver, 449–54
- Acoustic emission transducer, 57
- Acoustic holography, 279–91
  - acoustic imaging intensity detector, 285
  - holographic reconstruction, 279–85
  - imaging of vibrating objects, 294–96
  - scanned holographic imaging, 288–91
  - scanning laser acoustic microscope (SLAM), 291–94
  - Smith and Brenden technique, 286–88
  - spherical wave sources, 281–82
- Acoustic imaging intensity detector, 285
- Acoustic impedance, 9–13
  - input impedance, 12–13
  - quarter-wave matching sections, 12
- Acoustic losses, 8–9
  - loss mechanisms, 9
  - Poynting's theorem, 8
  - viscous losses, 8–9
- Acoustic parameters, of common materials, 548–61
- Acoustic pulse echo system, 483
- Acoustic transducers, 3
- Acoustic waveguides, 104–14
  - Lamb waves, 105, 108–9
  - shear horizontal modes, 106–7
- Acoustic wavelength:
  - in response to elastic, 203
  - in water, 197–98
- Acousto-optic effect, in anisotropic crystals, 588–90
- Acousto-optic filters, 501–28
  - Bragg deflection systems application, 517–18
  - prism coupler, 518
- Bragg diffraction by sound, 511–17
  - diffraction theory, 513
  - Raman-Nath interaction, 513–14
- convolver, 518–21
- light diffraction by sound, 503–9
  - acousto-optic figure of merit, 505–8
  - Fresnel length, 508
  - Raman-Nath theory, 508–9
- photoelastic effect, 501–3
- piezo-optic effect, 501–3
- Schlieren effect, 509–10
- time-integrating correlator, 521–28
  - one-dimensional transform, 524–26
  - two-dimensional transforms, 526–28
- Acousto-optic materials:
  - material constants for, 560–61
  - properties of, 560
- Adaptive filters, 480–500
  - additional uses, 497–98
  - eliminating an interfering signal, 495–98
  - notch filter, 495
  - inverse filter, 482–88
  - zero-forcing algorithm, 485–86

- Adaptive Filters (cont.)
  - removing phase errors with, 481–82
  - Wiener filter, 488–95
    - pseudo-inverse filter, 491–92
    - storage correlator as, 492–95
- Air gap storage correlator, 471–74
- Air-backed transducer, 50, 60–66
- Air-gap convolver, 463
- Ambiguity function:
  - distributions, 378
  - parabolic FM pulse waveforms, 381
- Amplifiers, 3
- Amplitude-weighted bandpass filter, 421–26
- Anisotropic crystals, 588–90
- Anisotropic elastic properties, 3
- Apodization functions, examples of, 389
- Apodized transducer, 330–32
- Approximations:
  - Born, 305–6
  - Fraunhofer, 167–71
  - Fresnel, 165, 182
  - Kirchhoff, 308–9
  - quasistatic, 306–7
- Asymmetric atomic lattice, 17
- Autoconvolution, 453
- Axial spatial frequencies, 172
  
- B-scan, 222–23
  - in medical imaging, 223
- B-scan frequency modulated chirp system, 257
- B-scan pulse array system, 259
- B-scan radial sector scan format, 226, 261
- Bandpass filter, 329–32, 415–43
  - amplitude-weighted, 421–26
  - triple transitecho, 426
  - building-block design technique, 427–31
  - “comb” response, 436
  - phase-weighted transducers, 426–27
  - recursive comb filter, 436–37
  - recursive filter, 432–43
  - with feedback, 434–37
  - fiber-optic, 439–43
  - single-mode fiber, 439
  - strip coupler, 416–21
- Bandpass-bandstop filter, 395
- Bandshape filter, 396
  
- Bartlett weighting, 389
- Biphase digital code, 324
- Blackmann weighting, 389
- Boltzmann’s constant, 362
- Born approximation, 305–6
- Bragg cell, 293
- Bragg condition, 514–15
- Bragg deflection systems:
  - application, 517–18
  - prism coupler, 518
- Bragg diffraction:
  - by sound, 511–17
  - diffraction theory, 513
  - Raman-Nath interaction, 513–14
- Bucket brigade device (BBD), 319, 339
  - field-effect transistor (FET), 341
  - performance limitation, 342–47
- Bulk elastic modulus, 87
- Buried channel, 350
- Buried layer, 586
  
- C-scan, 223–25
  - in nondestructive testing, 223, 225
- C-scan transmission system, 224
- Capacitance, zero strain, 32
- Cardiac imaging system, 261
- Charge, rate of movement, 583–86
- Charge-coupled device (CCD), 319, 339, 347–52
  - burned channel, 350
  - metal insulator semiconductor (MIS), 347
  - split electrode method, 350
- Charge-transfer device (CTD), 339–59
  - bucket brigade devices (BBD), 339, 341–47
  - field-effect transistor (FET), 341
  - performance limitation, 342–47
- charged coupled devices (CCD), 347–52
  - buried channel, 350
  - metal insulator semiconductor (MIS), 347
  - split-electrode method, 350
- imperfect charge-transfer efficiency, 352–56
- single transfer device (STD), 356–58
- switched capacitors, 356–58
  - fixed pattern noise, 356
- Charge-transfer efficiency, imperfect, 352–56
- Chip, 324
- Chirp transform programmable matched filter, 401
- Chirp z transform, 360
- Chirp z transform implementation, 399–409
- Chirp-focused systems, 251–58
- Chirp-fccused transmitter system, 254
- Clamped transducer, 34–35
- Clutter, 341
- Comb filter, 436–37
  - frequency characteristics, 438–39
  - frequency response, 437
  - fundamental structure, 436
- Compressive receiver, 395
- Computerized axial tomography (CAT) scanner, 275
- Confocal scanned microscopy, 198
- Conjugate filter, 325
- Conservation of mass, 5
  - in shear waves, 5
- Constitutive relations, 19–20, 75–83
- Conversion efficiency, of piezoelectric transducers, 1
- Convolvers, 448–77
  - acoustic, 449–54, 464–67
  - airgap, 463
  - airgap storage correlator, 471–74
  - charge-coupled device, 467–68
  - external mixer, 465
  - input correlation mode, 474–75
  - monolithic storage correlator, 471–74
  - SAW storage correlator, 469–77
  - semiconductor, 461–64
  - spread spectrum communications, 454–59, 475–77
    - frequency hopping modes, 458
    - range finding, 459
  - tapped-delay-line correlator, 470–71
  - waveguide, 459–61

- Correlation filter, 318
- Correlators, 469–74
  - airgap, 471–74
  - diode memory, 474
  - monolithic, 471–74
  - SAW storage, 469–77
  - spread spectrum, 456
  - tapped-delay-line, 470–71
- Creeping wave concept, 309–10
- Cross-correlations, 398–99
- Cubic crystal, 545–46
- Curie point, 19
- Deconvolution, of overlapping distorted pulses, 488
- Delay lines:
  - microwave, 3
  - superconductive, 409–12
  - tapped, 470–71
- Delta-function model, 119–22
- Depth of focus, 190–91
  - geometrical concepts for, 191–94
- Differential current integrator (DCI) output amplifier, 351
- Diffraction:
  - Green's function, 159–63
  - spherical waves, 156–58
- Diffusion, of charge, 583
- Digitally coded devices, 322–25
- Dilation, 87
- Dirichlet weighting, 389
- Displacement, 4, 75
- Dolph-Tchebysheff weighting, 389
- Doppler frequency shift, 368, 372, 527
- Double-spiral dispersive delay line, 412
- Edge-bonded transducer, 272
- Elasticity, 1, 4, 77
  - and Hooke's law, 4
- Elasticity tensor, 544–46
- Electrical impedance, of piezoelectric transducers, 1
- Electrical input impedance, 32–33, 51–53
- Electrical matching of a loaded transducer, 55–61
- Electromagnetic resonator, 154
- Electromechanical transducers, compared to piezoelectric transducers, 27
- Electronic scanning, 225
- Electrostatic field, 141
- Electrostatic potential, 567
- Energy, 87
- Equation of motion, 4–5
  - for solids and fluids, 90–92
- Equivalent circuits:
  - lumped, 37
  - Mason, 33–35
  - Redwood, 35, 41, 50
- Excitation:
  - by tone burst, 216–18
  - nonuniform, 154–64
  - pulsed, 212–18
- Extensional waves, 14–15
  - extensional wave velocity, 88–89
  - Young's modulus, 14
- External feedback loop, 336
- Fabry-Pero interferometer, 334
- Far-field region (*See* Fraunhofer zone, 154)
- Far-out sidelobes, causes of, 269
- "Fat zero," 344
- Ferroelectric materials, 17, 19–20
  - domains in, 19–20
  - poling in, 19
- Fiber-optic coupler, construction of, 441
- Fiber-optic recursive filter, 436–37
- Field-effect transistor (FET), 341
- Filter weighting, 387–91
  - Bartlett, 389
  - Blackmann, 389
  - Dirichlet, 389
  - Dolph-Tchebysheff, 389
  - Gaussian, 388
  - Hamming, 388–390
  - Hanning, 388
  - Kaiser, 389
- Filters:
  - acousto-optic, 501–28
  - adaptive, 480–500
  - amplitude-weighted bandpass, 421–26
  - bandpass, 329–332, 415–43
    - amplitude weighted, 421–26
    - apodized transducer, 330–32
    - building block design techniques, 427–31
    - comb response, 436
    - fiber-optic, 439–43
    - phase-weighted transducers, 426–27
    - recursive filter, 432–43
    - single-mode fiber, 439
    - strip coupler, 416–21
    - uniform transducer, 329–30
  - bandpass-bandstop, 395
  - bandshape, 395
  - comb filter, 436–37
  - conjugate, 325
  - correlation, 318
  - FM chirp analog, 332–33
    - chirp  $z$  transform implementation, 399–409
  - filter weighting for sidelobe reduction, 387–91
  - Fourier transform operations with, 391–99
  - mathematical treatment, 384–87
  - intermediate, 325
  - inverse, 319, 360, 482–88
    - zero-forcing algorithm, 485–86
  - matched, 359–83
    - ambiguity function, 376–83
    - for complex signals, 367–68
    - narrowband waveforms, 373–76
    - pulse compression, 372
    - radar system accuracy, 368
    - theory, 361–67
    - uncertainty relation, 372
    - Wiener, 360
  - notch, 495
  - pseudo-inverse, 491–92
  - RAC filters, 335–36
  - recursive, 432–43
    - comb, 436–37
    - with feedback, 434
    - fiber-optic, 439–43
  - switched capacitor, 319
    - fixed-pattern noise, 356
  - time-delay, 396
  - transversal, 117
  - weighting for sidelobe reduction, 387–91
  - Wiener, 360, 488–95
- Finger weighting, 328
- Finite exciting sources, 154–312
  - diffraction and nonuniform excitation, 154
  - focused transducers, 182–210
  - lenless acoustic imaging, 218–96

- Finite exciting sources (cont.)
  - plane piston transducers, 164–80
  - pulsed excitation of transducers, 212–18
  - reflection, 300–312
  - scattering, 300–312
- Fixed pattern noise, 356
- Flat piston transducer, 182
- Flexural mode, 109
- FM chirp filter (*See* Frequency modulated chirp filter)
- FM chirps (*See* Frequency-modulated chirps)
- Focused transducers, 182–212
  - 3-dB definition, 185
  - coherent imaging, 186–87
  - depth of focus, 190–91
  - geometrical concepts, 191–94
- F number, 185
- Gaussian beams, 206–10
  - apodization, 209–10
- incoherent imaging, 186–87
- lens aperture, 185
- paraxial equation, 206–10
- Rayleigh two-point definition, 187–88
- reflection from a planar reflector, 194–96
- sidelobes, 185–86
- sparrow two-point definition, 189
- speckle, 189–90
- spherical, field of, 182–97
- transverse definition, 185
- Focusing systems, acoustic imaging, 225–29
- Fourier transform, 171–75
  - Fourier transform convolver, 466
- Fourier transform output, 468
- Fraunhofer approximation, 167–71
- Fraunhofer region, 215
- Fraunhofer zone, 154, 165–67
- Frequency hopping modes, 458
- Frequency modulated chirp analog filter, 332–33
- Frequency modulated chirp filter, 383–99
  - chirp z transform implementation, 399–409
  - with a charge-coupled device, 406–9
  - sliding transform, 408–9
  - with superconductive delay lines, 409–12
- filter weighting for sidelobe reduction, 387–91
  - Blackmann weighting, 389
  - Dolph-Tchebysheff weighting, 389
  - Gaussian weighting, 388
  - Hamming weighting, 388–90
  - Hanning weighting, 388
  - Kaiser weighting, 389
  - rectangular weighting, 388
- Fourier transform operations
  - with, 391–99
- bandpass-bandstop filter, 395
- bandshape filter, 395
- compressive receiver, 395
- correlation or convolution of two signals, 396–99
- nonlinear processing, 399
- spectral whitening, 399
- time-delay filter, 396
- mathematical treatment, 384–87
  - main lobe width, 385
  - physics of, 386–87
  - sidelobes, 385–86
- Frequency-modulated chirps, 319
- Fresnel approximation, 165, 182
- Fresnel length, 508
- Fresnel lenses, 245–51
- Fresnel limit, 166
- Fresnel region, 214–15
- Fresnel ripples, 174
- Fresnel transducer, 228
- Fresnel zone, 154, 165–67
- Frionge field effect, of charge, 583
- Gases, acoustic constants for, 553
- Gauss theorem, 570
- Gaussian beams, 206–10
- Gaussian taper, 206, 209
- Gaussian weighting, 388
- Goos-Hanchen effect, 149
- Green's function, 159–63
  - Helmholtz's theorem, 159–60
- Kirchhoff formula, 160–61
- pressure release baffle, 162–63
- Rayleigh-Sommerfeld formula, 161–62
- rigid baffle, 162
- Sommerfeld radiation condition, 160
- transient source, 163
- Guided-wave Bragg diffraction, 519
- Half-wave resonator, 47
- Hamming taper, 210
- Hamming weighting, 388–90
- Hankel transform, 171–75
- Hanning weighting, 388
- Helmholtz's theorem, 159–60
- Hermite polynomials, 381
- High-speed scanning, 225
- Hilbert transform, 138
- Holography, 226–27
  - acoustic, 279–91
  - scanned, 288–91
  - Smith and Brenden technique, 286–88
- Holosonics holographic ultrasound imaging system, 289
- Hooke's law, 4, 14, 75, 77, 86–87, 109
- and elasticity, 4
- Ideal fluid, 87–88
- Image reconstruction, 282–85
- Impedances:
  - acoustic, 9–13
  - electrical input, 32–33, 51–53
  - at resonance, 52
  - constructional techniques, 51–52
  - input, 12–13
  - input impedance, 12–13
  - motional, 36
  - motional impedance, 36
  - quarter-wave matching sections, 12
  - radiation, 32
  - source, 58–59
  - specific acoustic, 9
- Imperfect charge-transfer efficiency, 352–56
- Impulse model, 326
- Interdigital transducers, 117–30, 322–29
  - delta-function model, 119–22
  - network theory, 123–30

- normal-mode theory, 131–37
    - leaky waves, 141–44
    - perturbation theory, 137–41
  - Intermediate frequency filter, 322
  - Inverse filter, 319, 360, 482–88
    - zero-forcing algorithm, 485–86
  - Isotropic media:
    - acoustic wave guides, 104–14
      - Lamb waves, 108–9
      - shear horizontal modes, 106–7
      - surface waves, 109–10
    - equations of motion for solids and fluids, 90–92
    - interdigital transducers, 117–30
      - delta-function model, 119–22
    - leaky waves, 141–44
    - network theory, 123–30
    - normal-mode theory, 131–37
    - perturbation theory, 137–41
  - mathematic formalism, 86–90
    - dilation, 87
    - energy, 87
    - Hooke's law, 86–87
    - ideal fluid, 87
    - Lame constants, 86
    - Poisson's ratio, 88–89
    - wave velocities, 89–90
    - Young's modulus, 86
  - plane wave reflection, 94–105
    - incident longitudinal wave, 96–98
  - plane wave refraction, 100–105
  - Rayleigh waves, 110–14
  - waves in, 85–153
    - longitudinal waves, 93–94
    - shear waves, 94
    - wave equation, 92–94
  - wedge transducer, 144–52
    - experimental results, 150
    - finite attenuation, 146–47
    - reflected wave, 149
- Isotropic solids, 1
- Kaiser weighting, 389
- Kirchhoff approximation, 308–9
- Kirchhoff formula, 160–61
- KLM model, 41–47, 50
- Lamb waves, 105, 108–9
  - flexural mode, 109
- Lame constants, 86
- Leaky waves, 141–44
- Least-mean-square (LMS) algorithm, 492
- Leith-Upatnieks hologram, 280
- Length expander bar, 83
- Lens imaging, 278
- Lens pupil function, 195
- Lensless acoustic imaging, 218–96
  - A-scan, 220–22
  - acoustic holography, 279–91
    - acoustic imaging intensity detector, 285
    - holographic reconstruction, 279–85
    - imaging of vibrating objects, 294–96
    - scanned holographic imaging, 288–91
    - scanning laser acoustic microscope (SLAM), 291–94
  - Smith and Brenden technique, 286–88
  - spherical wave sources, 281–82
- amplitude errors, 243–45
- applications, 218–20
  - nondestructive testing (NDT) field, 219
- B-scan, 222–23
- C-scan, 223–25
- chirp-focused systems, 251–58
  - basic system, 251–55
- focusing systems, 225–29
  - basic imaging theory, 229–45
  - elimination of physical lenses, 226–27
  - holography, 226–27
  - matched filter concepts, 229–31
  - matched filter theory, 237–38
- paraxial approximation, 231–32
- phase-delay focusing, 228–29
- physical lens, 227
- radial sector scan system, 232–34
- range definition, 235–36
- Rayleigh criterion, 234
- sparrow criterion, 235
- time-delay focusing, 227–28
- Fresnel lenses, 245–51
  - basic system, 245
  - phase sampling, 248–51
  - sidelobe level, 249–50
  - sidelobes, 248–51
- sidelobes, 238–39
  - apodization, 241
  - grating lobes, 239–41
- time-delay systems, 275–77
  - dynamically focused system, 261
  - grating lobes, 267–71
  - range resolution, 266
  - sampling lobes, 265–71
  - sidelobes, 265–71
  - surface acoustic wave imaging, 272–74
  - synthetic aperture imaging system, 262, 270–74
  - transverse definition, 266
  - TV display, 265
- tomographic imaging systems, 275–77
- Light diffraction by sound, 503–9
  - acousto-optic figure of merit, 505, 505–8
  - Bragg angle, 504
  - Bragg interaction, 504
  - Fresnel length, 508
  - Raman-Nath diffraction, 503
  - spots, 507
  - Raman-Nath theory, 508–9
  - limitations, 508–9
- Linear passive surface wave devices, 322–39
  - bandpass filter, 329–32
    - apodized transducer, 330–32
    - uniform transducer, 329–30
  - frequency modulated chirp analog filter, 332–33
- interdigital transducers, 322–29
  - digitally coded devices, 322–25
  - mathematical model, 326–29
  - resonators, 334
- Liquid surface imaging system, 287
- Liquids, material constants for, 552
- Longitudinal waves, 2, 93
  - longitudinal wave velocity, 88–89

- Longitudinal-to-shear wave converter, 99
- Loop output waveform, 457
- Losses:
  - acoustic, 8-9
  - loss mechanisms, 9
  - Poynting's theorem, 8
  - viscous losses, 8-9
- Lumped equivalent circuit, 37
- Macrobend tapped delay line, 440
- Mason equivalent circuit, 33-35
- Matched filter, 359-83
  - ambiguity function, 376-83
  - for complex signals, 367-68
  - pulse compression, 366
  - radar system accuracy, 368
  - inequality proof, 373
  - narrowband waveforms, 373-76
  - uncertainty relation, 372
  - theory, 361-67
  - Wiener filter, 360
- Material displacement, 4, 75
- Maxwell's equation, 564
- Medical applications:
  - of acoustic sound waves, 194, 219-20, 222
  - focused transducer for, 194
- Metal insulator semiconductor (MIS), 347
- Metal-oxide semiconductor (MOS), 339
- Method of stationary phase, 179-80
- Microwave delay lines, 3
- Military radar systems, 461
- Miller effect, 346
- Monolithic storage correlator, 471-74
- Motion tomography, 276
- Motional impedances, 36
- Moving target indicator (MTI) radar, 433
- Narrowband waveforms, 373-76
- NAVSTAR global navigation system, 459
- Near-field region (*See* Fresnel zone, 154)
- Near-in sidelobes, causes of, 269
- Network theory, 123-30
  - crossed-field model, 124-30
  - normal mode formalism, 123
- Nondispersive bandpass filter, 331
- Noninvasive techniques in clinical testing, 219
- Nonlinear interaction, between surface waves, 321
- Nonpiezoelectric materials, 1-15, 75-82
  - normal-mode theory, 569-73
  - reduced subscript notation, 78-83
  - soundwaves in, 2-15
    - acoustic impedance, 9-13
    - acoustic losses, 8-9
    - conservation of mass, 4-5
    - displacement, 4
    - elasticity, 4
    - energy, 6-7
    - equation of motion, 4-5
    - extensional waves, 14-15
    - Hooke's law, 4
    - Poynting's theorem, 7
    - propagation constant, 5-6
    - shear waves, 13-14
    - strain, 4
    - stress, 3-4
  - tensor notation, 75, 77-78
- Nonuniform excitation, 154-65
  - Green's function, 159-63
  - spherical waves, 156-58
- Normal modes, 420
- Normal-mode expansion, 571-73
- Normal-mode theory, 131-37, 569-73
  - power flow concepts, 133-34
- Normalized line-spread function, 237
- Notation, 542-46
  - reduced subscript, 78-83
  - tensor, 75, 77-78
- Notch filter, 495
- Open-circuited transducer, 35
- Orthogonality, 571
- Outward normal, 303
- Paraxial rectilinear system, 232
- Parseval's theorem, 363, 371, 377
- Particle displacement, 1
- Perfect plane reflector, 194
- Perturbation theory, 137-41
- Phase-delay focusing, 228-29
- Phase-weighted transducers, 426-27
- Photoacoustic microscopy, 205
- Photoelastic effect, in acousto-optic filters, 501-3
- Piezo-optic constant of water, 503
- Piezo-optic effect, in acousto-optic filters, 501-3
- Piezoelectric ceramics, properties of, 554-55
- Piezoelectric constitutive relations, 19
- Piezoelectric coupling constant, 1, 21
- Piezoelectric materials, 1, 17-26, 75-83
  - constitutive relations, 19-20, 75-83
  - domains in ferroelectric materials, 19-20
  - effect of coupling on wave propagation, 21-22
  - stiffened elastic content, 21
  - electric field in, 17
  - energy conservation in, 24-26
  - ferroelectric materials, 17, 19
  - poling in ferroelectric materials, 19-20
  - Curie point, 19
  - Poynting's theorem, 563-65
  - reduced subscript notation, 78-83
  - stress-free dielectric constant, 22
  - tensor notation, 75, 77-78
- Piezoelectric tensor, 546-47
- Piezoelectric transducers, 1, 27-75
  - compared to electromechanical transducers, 27
  - electrical input impedance, 51-53
    - at resonance, 52
  - constructional techniques, 51-52
  - terminated transducer, 52-53
  - electrical matching of a loaded transducer, 55-61
  - impedance of an unloaded transducer, 35-41
  - lumped equivalent circuits, 37
  - Mason equivalent circuit, 40
  - motional impedance, 36

- KLM model, 41–47, 50
  - effects of reflections on response, 45–47
  - half-wave resonators, 47
  - quarter-wave resonators, 47
- Mason equivalent circuit, 33–35
- power transfer to transducer, 53–54
- radiation impedances, 32
- reduced subscript notation, 78–83
- Redwood equivalent circuit, 35, 41, 50
- Reeder-Wislow design method, 61–66
- tensor notation, 77–78
- as a three-port network, 29–33
- transducer acoustically
  - matched at each end, 56
  - acoustic load with electrical tuning, 58–59
  - acoustic load with source impedance, 58–59
  - acoustic load with source resistance, 58–59
  - air-backed transducer
    - matched at output, 56–57
  - tuned air-backed transducer, 60–61
  - untuned air-backed transducer, 60–61
  - untuned transducer, 60
- transducer design examples, 66–70
- transducer pulse response with arbitrary terminations, 47–50
  - air-backed transducer, 50, 60–66
  - unmatched front surface, 50
- transmitting constant, 31
- velocity, 30
- zero strain capacitance, 32
- Piezoelectrically stiffened elastic content, 21
- Piston transducer, 175
- Pitch/catch imaging, 273, 275
- Plane piston transducers, 164–82
  - diffraction from rectangular transducers, 175–80
  - fields on axis, 164
  - Fourier transform, 171–75
  - Fraunhofer approximation, 167–71
  - Fraunhofer zone, 165–67
  - Fresnel approximation, 165, 182
  - Fresnel limit, 166
  - Fresnel ripples, 174
  - Fresnel zone, 165–67
  - Hankel transform, 171–75
  - paraxial approximation, 165, 182
  - spatial frequency concepts, 171–75
- Plane wave propagation, 1
- Plane wave reflection, 94–105
  - incident longitudinal wave, 96–98
- Plane wave refraction, 100–105
- PN-coded waveform, 455
- Point spread function (PSF), 201, 232
- Poisson's ratio, 88–89
- Power flow per unit area, 7
- Poynting's theorem, 7, 8, 24–25, 563, 563–65
- Pressure release baffle, 162–63
- Principal normal sections, 301
- Prism coupler, 518
- Processing gain, 325
- Propagation of acoustic sound waves, 1–84
  - acoustic impedances, 9–13
    - input impedance, 12–13
  - quarter-wave matching sections, 12
  - acoustic losses, 8–9
    - loss mechanisms, 9
    - viscous losses, 8–9
  - conservation of mass, 5
  - constitutive relations, 75–83
  - in crystalline materials, 2
  - displacement, 4
  - elasticity, 4
  - energy, in a medium, 6–7
  - equation of motion, 4–5
  - extensional waves, 14–15
    - Young's modulus, 14
  - longitudinal wave, 2
  - in nonpiezoelectric materials, 2–15
    - conservation of mass, 4–5
    - displacement of, 4
    - equation of motion, 4–5
    - Hooke's law, 4
    - Poynting's theorem, 7
    - propagation constant, 5–6
- reduced subscript notation, 78–83
- sound waves in, 2–15
- tensor notation, 75, 77–78
- one-dimensional theory, 2–15
- piezoelectric materials, 17–25, 75–82
  - constitutive relations, 19–20, 75–83
- Curie point, 19
- effect of coupling on wave propagation, 21–22
- electric field in, 17
- energy conservation in, 24–26
- stress-free dielectric constant, 22
- piezoelectric transducers, 27–75
  - electrical input impedance, 51–53
  - electrical matching of a loaded transducer, 55–61
  - impedance of an unloaded transducer, 35–41
  - KLM model, 41–47, 50
  - Mason equivalent circuit, 33–35
  - power transfer to transducer, 53–54
  - radiation impedance, 32
  - reduced subscript notation, 78–83
  - Redwood equivalent circuit, 35, 41, 50
  - Reeder-Winslow design method, 61–66
  - tensor notation, 77–78
  - as a three-port network, 29–33
  - transmitting constant, 31
  - velocity, 30
  - zero strain capacitance, 32
- propagation constant, 5–6
- shear wave, 2, 13–14
- in solids, 1
- strain, 4
- stress, 3–4
- tensor notation, 75–83
- Propagation constant, 5–6
- Proximity-tapped delay line, 412
- Pseudo-inverse filter, 491–92
- Pseudonoise code, 455
- Pulse compression ratio, 325

- Pulse response characteristics, of piezoelectric transducers, 1
- Pulse-echo system, 483
- Pulsed excitation:
  - Fraunhofer region, 215
  - Fresnel region, 214–15
  - of transducers, 212–18
  - transient response, 213–14
- Quarter-wave resonator, 47
- Quasistatic approximation, 306–7
- Quasistatic theory, 580–82
  - for fields inside a sphere, 580–82
- Radar range accuracy, 360
- Radial sector scan, 233
- Radial spatial frequencies, 172
- Radiation impedances, 32
- Raman-Nath criterion for water, 509
- Raman-Nath interaction, 513–14
- Ray-tracing geometry, 200
- Rayleigh criterion, 234
- Rayleigh scattering limit, 306
- Rayleigh waves, 105, 109, 110–14, 117
  - detection, 323
  - excitation, 323
    - by an acoustic microscope lens, 203
  - Rayleigh root, 113
  - velocity, 113–14
- Rayleigh-Sommerfeld integral, 155
- Receiver constant, 82
- Rectangular weighting, 388
- Recursive filters:
  - comb, 436–37
  - with feedback, 434
  - fiber-optic, 439–43
- Reduced form, 78
- Reduced subscript notation, 78–83
- Redwood equivalent circuit, 35, 41, 50
- Reeder-Winslow design method, 61–66
- Reflection in plane waves, 94–104
- Reflective array compressor, 335
- Refraction in plane waves, 94–104
- Relative time of arrival determination, 401
- Resonators, 334
- Rigid baffle, 162
- Sample-and-hold model, for a single transfer device (STD), 357
- SAW devices (*See* Surface acoustic wave devices)
- Scan imaging:
  - A-scan, 220–22
  - B-scan, 222–23
  - C-scan, 223–25
- Scanned holographic imaging, 288–91
- Scanning laser acoustic microscope (SLAM), 291–94
- Scattering:
  - of acoustic waves, 300–313
  - by large objects, 301–3
  - general theory, 303–12
    - Born approximation, 305–6
    - Kirchhoff approximation, 308–9
    - quasistatic approximation, 306–7
    - surface integral formulation, 304–5
    - volume integral formulation, 304–5
- Rayleigh scattering, 300
  - Born approximation, 305–6
  - general theory, 303–12
  - Kirchhoff approximation, 308–9
  - quasistatic approximation, 306–7
  - surface integral formulation, 303–4
  - volume integral formulation, 304–5
- Schlieren effect, 509–10
- Schlieren optical system, 509–10, 510, 521
- Schwarz's inequality, 363, 366–67
- Self-induced drift, of charge, 583
- Semiconductor convolver, 461–64
- Shear horizontal mode, 106–7
- Shear horizontal wave, 100, 105
- Shear modulus, 86
- Shear wave, 2, 13–14, 94
  - Shear wave velocity, 88–89
- Sidelobe reduction, 387–91
  - Dirichlet weighting, 389
  - Dolph-Tchebysheff weighting, 389
  - Gaussian weighting, 388
  - Hamming weighting, 388–90
  - Kaiser weighting, 389
  - rectangular weighting, 388
  - triangular weighting, 389
- Single transfer device (STD), 319, 339, 356–58
- Single-mode fiber, 439
- Single-pole recursive filter, 434
- Sliding transform, 408–9
- Smith and Brenden holographic technique, 286–88
- Snell's law, 96, 460
- Solids, bulk material constants
  - for, 549–51
- Sound wave propagation, 1–84
  - acoustic impedances, 9–13
    - input impedance, 12–13
    - quarter-wave matching sections, 12
  - acoustic losses, 8–9
    - loss mechanisms, 9
    - viscous losses, 8–9
  - conservation of mass, 5
  - constitutive relations, 75–83
  - in crystalline materials, 2
  - displacement of a material, 4
  - energy, 6–7
  - equation of motion, 4
  - extensional waves, 14–15
    - Young's modulus, 14
  - longitudinal wave, 2
  - in nonpiezoelectric materials, 2–15
    - conservation of mass, 4–5
    - displacement of, 4
    - equation of motion, 4–5
    - Hooke's law, 4
    - Poynting's theorem, 7
    - propagation constant, 5–6
    - reduced subscript notation, 78–83
    - sound waves in, 2–15
    - tensor notation, 75, 77–78
  - one-dimensional theory, 2–15
  - in piezoelectric materials, 17–25, 75–82



- constitutive relations, 19–20, 75–83
- Curie point, 19
- effect of coupling on wave propagation, 21–22
- electric field in, 17
- energy conservation in, 24–26
- stress-free dielectric constant, 22
- piezoelectric transducers, 27–75
  - electrical input impedance, 51–53
  - electrical matching of a loaded transducer, 55–61
  - impedance of an unloaded transducer, 35–41
  - KLM model, 41–47, 50
  - Mason equivalent circuit, 33–35
  - power transfer to transducer, 53–54
  - radiation impedance, 32
  - reduced subscript notation, 78–83
  - Redwood equivalent circuit, 35, 41, 50
  - Reeder-Winslow design method, 61–66
  - tensor notation, 77–78
  - as a three-port network, 29–33
  - transmitting constant, 31
  - velocity, 30
  - zero strain capacitance, 32
- Poynting's theorem, 7, 8
- propagation constant, 5–6
- reduced subscript notation, 78–83
- shear waves, 2, 13–14
- in solids, 1
- strain, 4
- stress, 3–4
- tensor notation, 75–83
- Sparrow criterion, 235
- Specific acoustic impedance, 9
- Spectral whitening, 399
- Specular reflection, 310
- Spherical aberrations of lenses, 200
- Spherical reference waves, 279–85
  - Spherical waves, 156–58
    - liquid medium, 157
    - vibrating spheres, 156–57
  - Split-gate sampled weighting, 408–9
  - Split-output electrode convolver, 464–65
  - Spread-spectrum communications, 454–59, 475–77
    - frequency hopping modes, 458
  - Spread-spectrum correlator, 456
  - Square pulse, matched filter for, 364–65
  - Stationary phase method, 578–79
  - Straight-crested wave, 332
  - Strain, 1, 4, 75
  - Strain tensor, 537–39, 542–44
  - Strain vectors, 537–42
    - strain tensor, 537–40
  - Stress, 1, 3–4, 75
    - in a solid, 3–4
  - Stress tensor, 540–41, 544
  - Stress vectors, 537–42
    - equation of motion, 542
    - stress tensor, 540–41
  - Stress-free dielectric constant, 22
  - Strip coupler, 416–21
  - Strip guide mode, 90
  - Superconductive delay line, 410
  - Superconductive dispersive filter, 413
  - Surface acoustic wave devices, 319
  - Surface acoustic wave excitation, 134–37
    - physical implications, 135
  - Surface acoustic wave storage correlator, 469–77
  - Surface integral formulation, 303–4
  - Surface waves, 109–10
  - Switched capacitors, 356–58
    - filter, 319
    - fixed pattern noise, 356
  - Symbolic notation, 542–46
    - elasticity tensor, 544–46
    - piezoelectric tensor, 546–47
    - strain tensor, 542–44
    - stress tensor, 544
  - Tapped systems, 346–47
    - BBD lines, 357–58
    - CCD line, 350, 357–58
- Tapped-delay-line correlator, 470–71
- Temperature drifts, 456
- Tensor components, 78
- Tensor notation, 77–78
- Tensor quantities, 1
- Tensors:
  - elasticity, 544–46
  - piezoelectric, 546–47
  - strain, 537–39, 542–44
  - stress, 540–41, 544
- 3-dB points, 180
- Three-port network, transducer as, 29–33
- Time-bandwidth product, 325
- Time-delay filter, 396
- Time-delay focusing, 227–28
- Time-delay imaging systems, 261–75
- Time-integrating correlator, 521–28
  - one-dimensional transforms, 524–26
  - two-dimensional transforms, 526–28
- Tomographic imaging systems, 275–77
  - dynamically focused system, 261
  - grating lobes, 267–71
  - range resolution, 266
  - sampling lobes, 265–71
  - sidelobes, 265–71
  - surface acoustic wave imaging, 272–74
  - synthetic aperture imaging system, 262, 270–74
  - transverse definition, 266
  - TV display, 265
- Total stored energy, 6–7
- Transducer admittance matrix, 574–77
  - crossed-field model, 574, 577
  - in-line model, 574, 577
- Transducer electrical input admittance, 128
- Transducer materials, properties of, 557–58
- Transducers:
  - acoustic, 3
  - acoustic emission, 57
  - air-backed, 50, 60–66
  - apodized, 330–32

- Transducers (cont.)
  - clamped, 34–35
  - crossed-field, 83
  - design examples, 66–70
  - electromechanical, 27
  - flat piston, 182
  - focused, 182–212
  - Fresnel, 228
  - interdigital, 117–30, 322–29
  - loaded, 55–61
  - open-circuited, 35
  - phase-weighted, 426–27
  - piezoelectric, 1, 27–75
  - plane piston, 164–82
  - pulsed excitation of, 212–18
  - rectangular, 175–80
  - tuned, 60
  - tuned air-backed, 60–61
  - ultrasonic, 1
  - uniform, 329–30
  - unloaded, 35–41
  - untuned, 60
  - untuned air-backed, 60–61
  - wedge, 144–52
  - zinc oxide, 54
- Transforms:
  - chirp  $z$  transform, 360
  - Fourier, 171–75
  - Hankel, 171–75
  - one-dimensional Bragg, 524–26
  - sliding, 408–9
  - two-dimensional Bragg, 526–28
- Transmitting constant, 31, 82
- Transversal filters, 117, 318–536
  - acousto-optic filters, 501–28
    - Bragg deflection systems applications, 517–18
    - Bragg diffraction by sound, 511–17
    - convolver, 518–21
    - light diffraction by sound, 503–9
    - photoelastic effect, 501–3
    - piezo-optic effect, 501–3
    - Schlieren effect, 509–10
    - time-integrating correlator, 521–28
  - adaptive filters, 480–500
    - additional uses, 497–98
    - eliminating an interfering signal, 495–98
    - inverse filter, 482–88
    - notch filter, 495
  - removing phase errors with, 481–82
  - Wiener filter, 488–95
- bandpass filters, 415–43
  - amplitude-weighted, 421–26
  - building block design technique, 427–31
  - “comb” response, 436
  - phase-weighted transducers, 426–27
  - recursive comb filter, 436–37
  - single-mode fiber, 439
  - strip coupler, 416–21
- charge-transfer devices (CTD), 339–59
  - bucket brigade device (BBD), 339, 341–47
  - charge-coupled devices (CCD), 347–52
  - imperfect charge-transfer efficiency, 352–56
  - single transfer device (STD), 356–58
  - switched capacitors, 356–58
- convolvers, 448–77
  - acoustic, 449–54, 464–67
  - airgap, 463
    - air-gap storage correlator, 471–74
  - charge-coupled device, 467–68
  - external mixer, 465
  - input correlation mode, 474–75
  - monolithic storage correlator, 471–74
  - SAW storage correlator, 469–77
  - semiconductor, 461–64
  - spread-spectrum communications, 454–59, 475–77
  - tapped-delay-line correlator, 470–71
  - waveguide, 459–61
- frequency modulated chirp filters, 383–99
  - chirp  $z$  transform implementation, 399–409
  - filter weighting for sidelobe reduction, 387–91
  - Fourier transform operations with, 391–99
- linear passive surface wave devices, 322–39
  - bandpass filter, 329–32
  - frequency modulated chirp analog filter, 332–33
  - interdigital transducers, 322–29
  - reflective array compressor (RAC) filters, 335–36
  - resonators, 334
  - stabilized SAW oscillators, 336
  - matched filters, 359–83
    - ambiguity function, 376–83
    - for complex signals, 367–68
    - pulse compression, 366
    - radar system accuracy, 368
    - theory, 361–67
    - Wiener filter, 360
- Transverse spatial frequencies, 172
- Triangular weighting, 389
- Triple transit echo, 426
- Tuned air-backed transducer, 60–61
- Tuned transducer, 60
- Ultra-high frequency (UHF) delay lines, 51
- Ultrasonic transducer, 1
- Uncertainty ellipse, 379
- Unmatched front surface, 50
- Untuned air-backed transducer, 60–61
- Untuned transducer, 60
- Variable delay line, 441
- Vector components, 78
- Vibrating objects, holographic imaging, 294–96
- Volume integral formulation, 304–6
- Waveguide convolver, 459–61
- Wave guide convolver configuration, 461
- Wave propagation with finite exciting sources, 154–317
  - A-scan imaging, 220–22
  - acoustic holography, 277–96
    - imaging of vibrating objects, 294–96
  - scanning laser acoustic microscope, 291–94
  - acoustic imaging applications, 218–20
  - amplitude errors, 243–45
  - B-scan imaging, 222–23


- basic imaging theory, 229–45
- C-scan imaging, 223–25
- chirp-focused systems, 251–77
  - synthetic aperture imaging, 270–74
  - tomographic imaging systems, 275–77
- diffraction and nonuniform excitation, 154–64
- digital sampling, 245–48
- field of a focused spherical transducer, 182
- fields on axis, 164
- focused transducers, 182–212
- focusing systems, 225–29
- Fresnel lenses, 245–48
  - sidelobes, 248–51
- Gaussian taper, 206–10
- grating lobes, 239–41
- Green's function, 158–63
- high-speed scanning, 225–29
- lensless acoustic imaging, 218–96
- matched fiber concepts, 229–31
- plane piston transducers, 164–80
- pulsed excitation of transducers, 212–18
- radial sector scan system, 232
- radial variation of the field, 171–75
- rectangular transducer diffraction, 175–80
- reflection by small and large objects, 300–312
- scanned acoustic microscope, 197–206
- scattering by small and large objects, 300–312

- sidelobes, 238–39
- spherical waves in a liquid or solid, 156–58
- taper, 206–10
- Wave(s):
  - creeping, 309
  - devices, 319
  - equation, 92–94
  - extensional, 14–15
  - imaging, 272–74
  - incident longitudinal, 96–98
  - in isotropic media, 85–153
    - acoustic waveguides, 104–14
    - basic theory, 86–105
    - equations of motion for solids and fluids, 90–92
  - interdigital transducers, 117–31
  - mathematic formalism, 86–90
  - plane wave reflection and refraction, 94–104
  - Rayleigh waves, 110–14
  - wave equations, 92–94
  - wedge transducers, 144–52
- Lamb, 108–9
- leaky, 141–44
- longitudinal, 2, 93–94
- plane, 94–105
- propagation, 1–84
  - in crystalline materials, 2
  - in nonpiezoelectric materials, 2–15
  - in piezoelectric materials, 17–25, 75–82
- Rayleigh, 110–14
- reflected, 149
- scattering of, 300–313
- shear, 2, 13–14, 94, 100, 105
- shear horizontal, 100, 105

- spherical, 156–58
  - reference, 279–85
  - sources, 281–82
- storage correlator, 469–77
- straight-crested, 332
- surface, 109–10
- velocities, 89–90
- Wedge transducer, 144–52
  - experimental results, 150
  - finite attenuation, 146–47
  - reflected wave, 149
- Weighting:
  - Bartlett, 389
  - Blackmann, 389
  - Dirichlet, 389
  - Dolph-Tchebysheff, 389
  - filter, 387–91
  - finger, 328
  - Gaussian, 388
  - Hamming, 388–90
  - Hanning, 388
  - Kaiser, 389
  - rectangular, 388
  - triangular, 389
- Weighting functions, properties of, 390
- Wiener filter, 488–95
  - pseudo-inverse filter, 491–92
  - storage correlator as, 492–95
- Windowing, 388
- Windows, and their Fourier transforms, 389
- X-rays, 219, 220
- Young's modulus, 14, 88
- Zero-forcing algorithm, 485–86
- Zero-strain capacitance, 32
- Zinc oxide transducer, 54

GORDON S. KINO

# ACOUSTIC

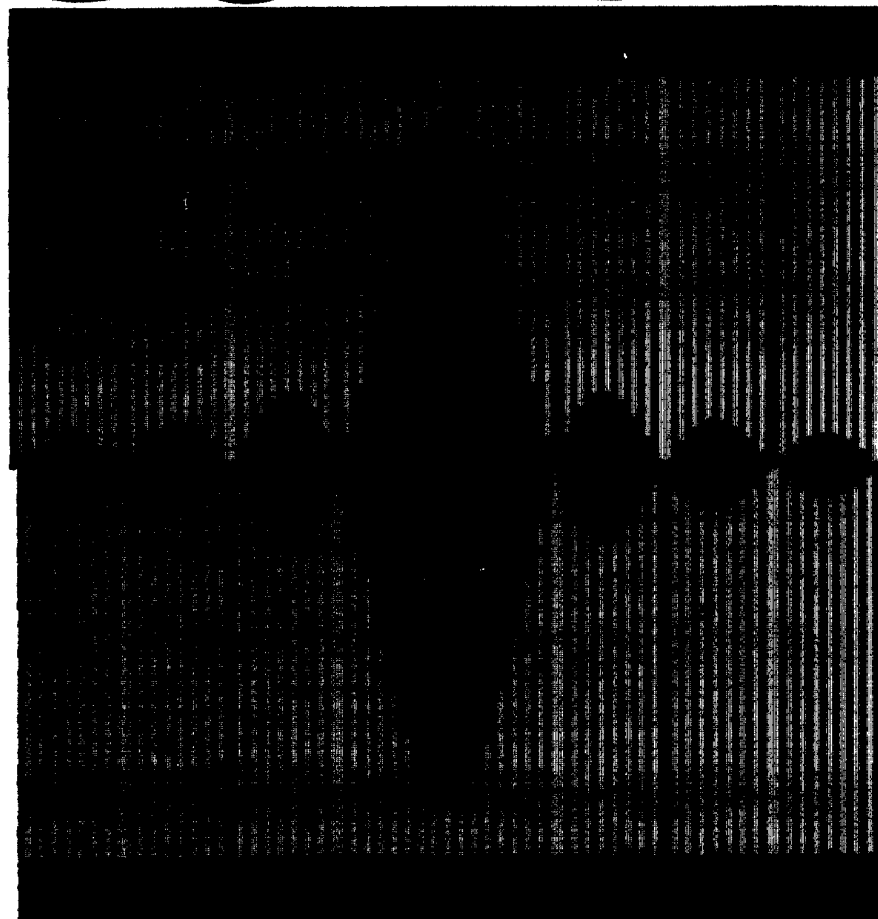

# WAVES

DEVICES, IMAGING, & ANALOG  
SIGNAL PROCESSING